

# SUNTRONIC PV 3000 PRO

SINGLE PHASE HYBRID INVERTER




**BUILT-IN WIFI**

Built-in WiFi with remote monitoring APP



**WARRANTY**


18 Months Warranty



**GRID FEEDING**

Grid Feeding

# PV 3000 PRO FEATURES

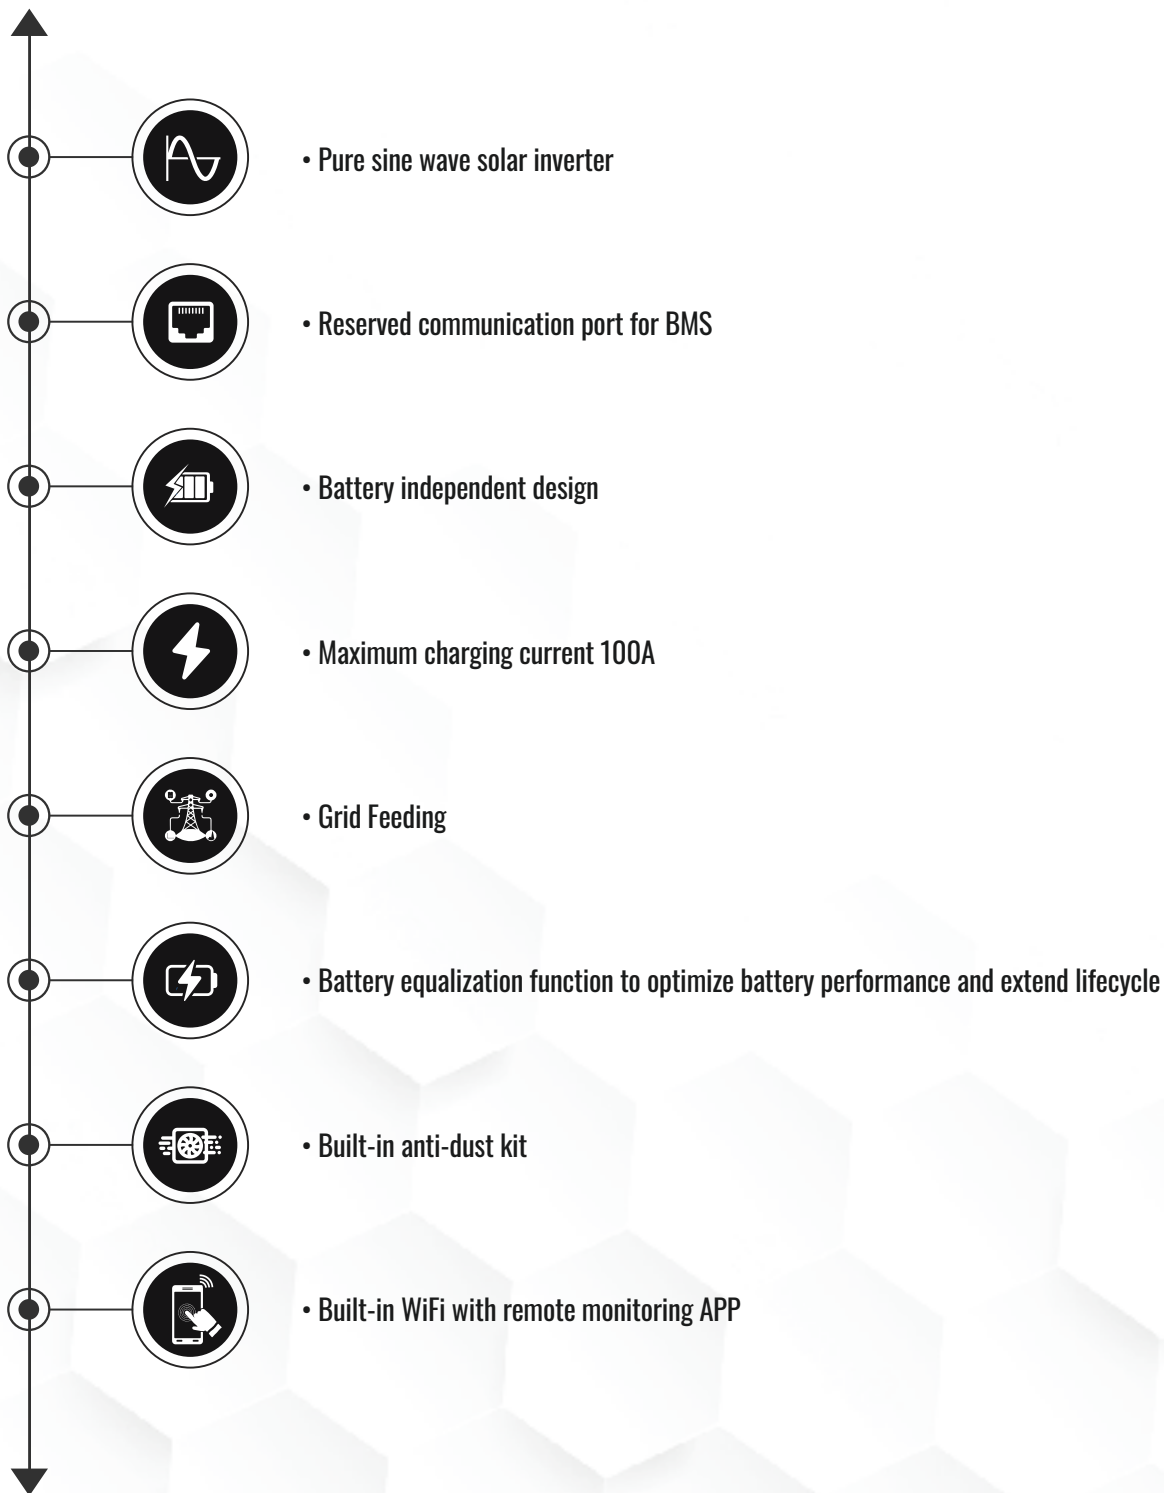

# DATASHEET

MODEL	SUNTRONIC PV 3000 PRO
Rated Power	3000VA/3000W
INPUT	
Voltage	230 VAC
Selectable Voltage Range	170-280 VAC (For Personal Computers) ; 90-280 VAC (For Home Appliances)
Frequency Range	50 Hz/60 Hz (Auto sensing)
OUTPUT	
AC Voltage Regulation (Batt. Mode)	230VAC $\pm$ 5%
Surge Power	6000VA
Efficiency (Peak)	93%
Transfer Time	10 ms (For Personal Computers) ; 20 ms (For Home Appliances)
Waveform	Pure sine wave
BATTERY	
Battery Voltage	24 VDC
Floating Charge Voltage	27 VDC
Overcharge Protection	32 VDC
SOLAR CHARGER & AC CHARGER	
Solar Charger Type	MPPT
Maximum PV Array Open Circuit Voltage	450 VDC
Maximum PV Array Power	3000W
MPP Range @ Operating Voltage	30 ~ 400 VDC(30 ~ 60VDC with battery connected)
Maximum Solar Charge Current	100A
Maximum AC Charge Current	80A
Maximum Charge Current	100A
PHYSICAL	
Dimension, D x W x H (mm)	110 x 288 x 390
Net Weight (kgs)	7.2
Communication Interface	RS232/RS485/WiFi
ENVIRONMENT	
Humidity	5% to 95% Relative Humidity (Non-condensing)
Operating Temperature	-10°C to 50°C
Storage Temperature	-15°C to 60°C

Product specifications are subject to change without further notice.